

报告编号:

测试时间: 2019-07-11 19:01

产品特征

灯具制造厂商: 佛山市睿锋照明有限公司
灯具型号: LPC3055A
发光面宽度(mm): 50
电流: 0.038 A
功率因数: 0.943


发光面长度(mm): 50
电压: 230.1 V
功率: 8.12 W

光度结果


灯具CIE分类: 直接型
灯具光通量: 419.5 lm
下射光通量比: 100%
有效光束角(C0/C180, C90/C270, C45/C225, C135/315): 35.7, 35.2, 34.9, 35.9
半峰边角(C0/C180, C90/C270, C45/C225, C135/315): 17.8, 17.5, 17.4, 17.8
灯具光效等级(LER): 51.72
峰值光强: 3302.92 cd
S/MH(C0/C180): 0.30

额定光通量: 419.5 lm
灯具效率: 100%
上射光通量比: 0%
中心光强: 3297.66 cd
峰值光强位置: H135 V1
S/MH(C90/C270): 0.30

灯具实物照片



配光曲线

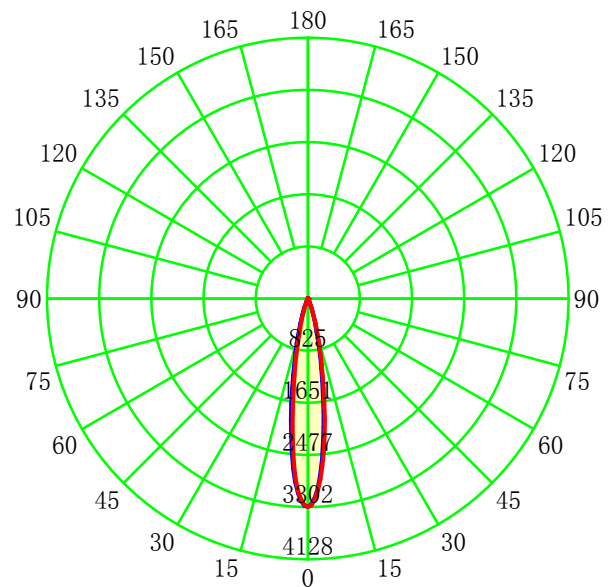

单位: cd

— C0-C180 — C90-C270

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

配光曲线

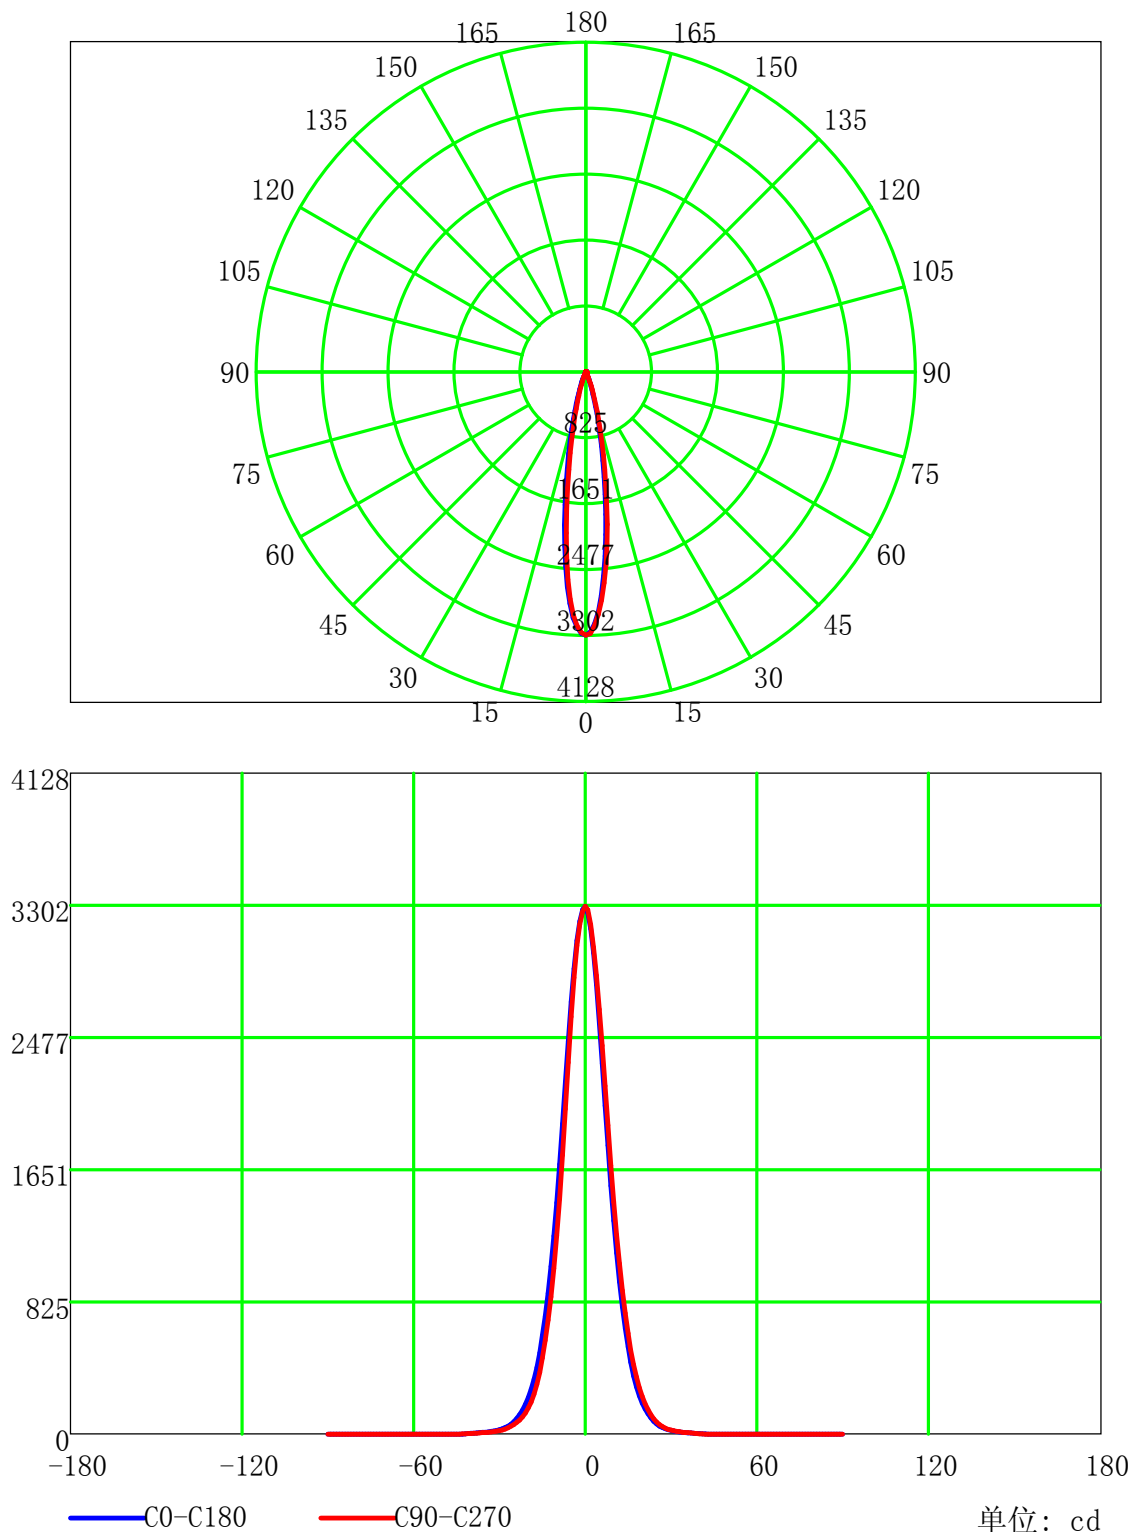

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

配光曲线(cd/klm)

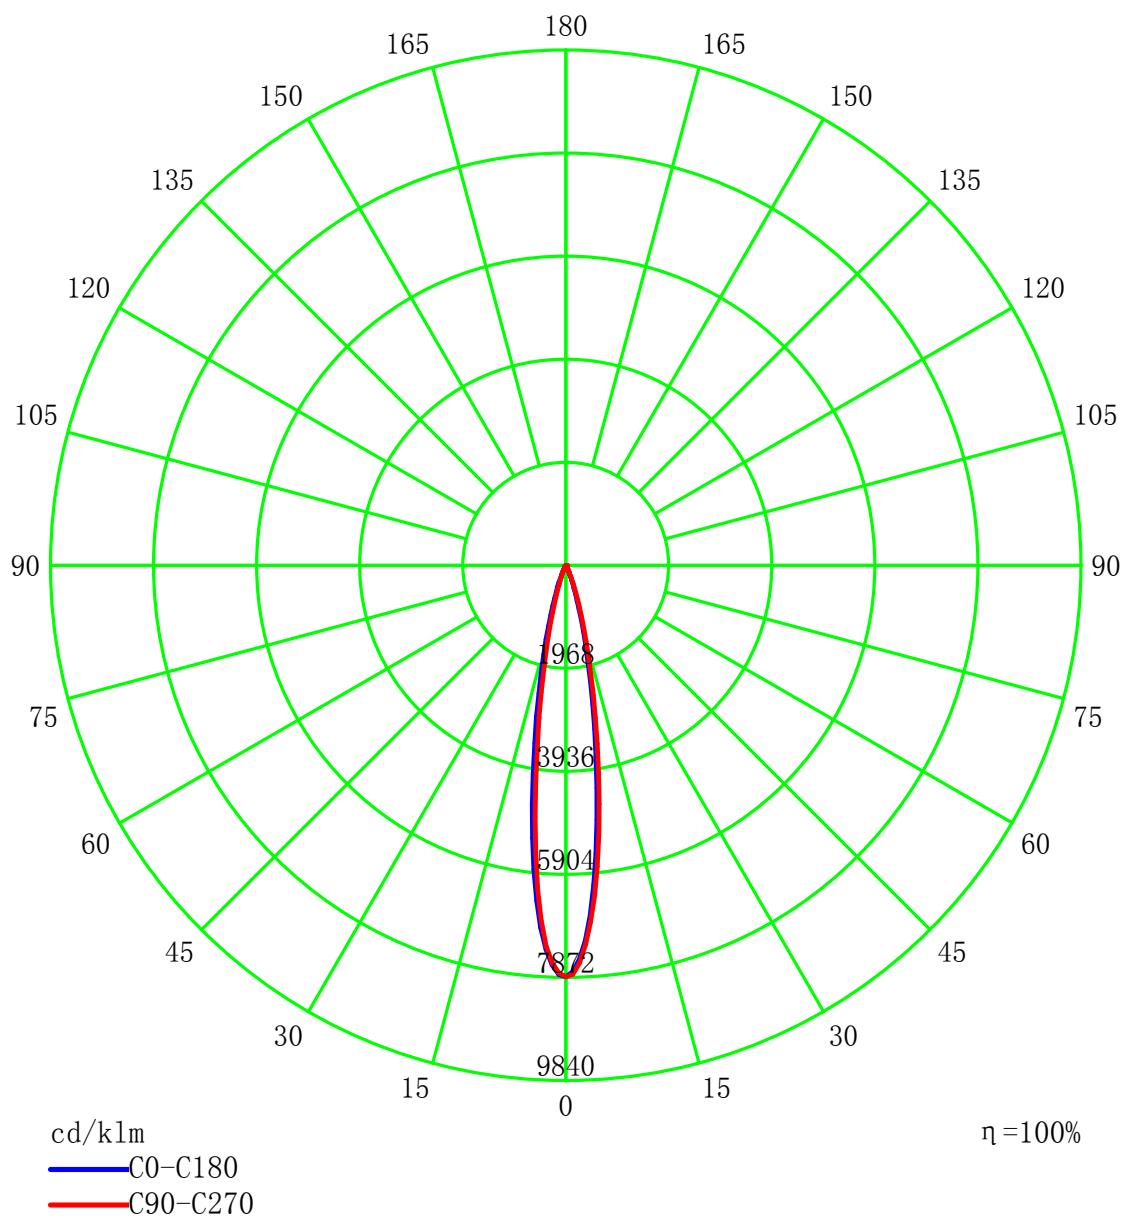

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:




室内灯具利用系数表

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	116	114	112	110	113	111	110	109	108	106	105	104	103	102	101	100	99	98
2	112	109	106	104	110	107	105	103	104	102	101	102	100	99	99	98	97	95
3	109	105	102	100	108	104	101	99	101	99	97	99	97	96	97	96	94	93
4	107	102	98	96	105	101	98	95	99	96	94	97	95	93	95	94	92	91
5	104	99	95	93	103	98	95	92	97	94	92	95	93	91	94	92	90	89
6	102	96	93	90	101	96	92	90	94	91	89	93	91	89	92	90	88	87
7	99	94	90	88	98	93	90	88	92	89	87	91	89	87	90	88	86	85
8	97	92	88	86	96	91	88	86	90	87	85	90	87	85	89	86	85	84
9	95	90	86	84	95	89	86	84	89	86	84	88	85	83	87	85	83	82
10	94	88	84	82	93	88	84	82	87	84	82	86	84	82	86	83	82	81


最大允许安装距离高度比(对角): 0.32

灯具概算曲线

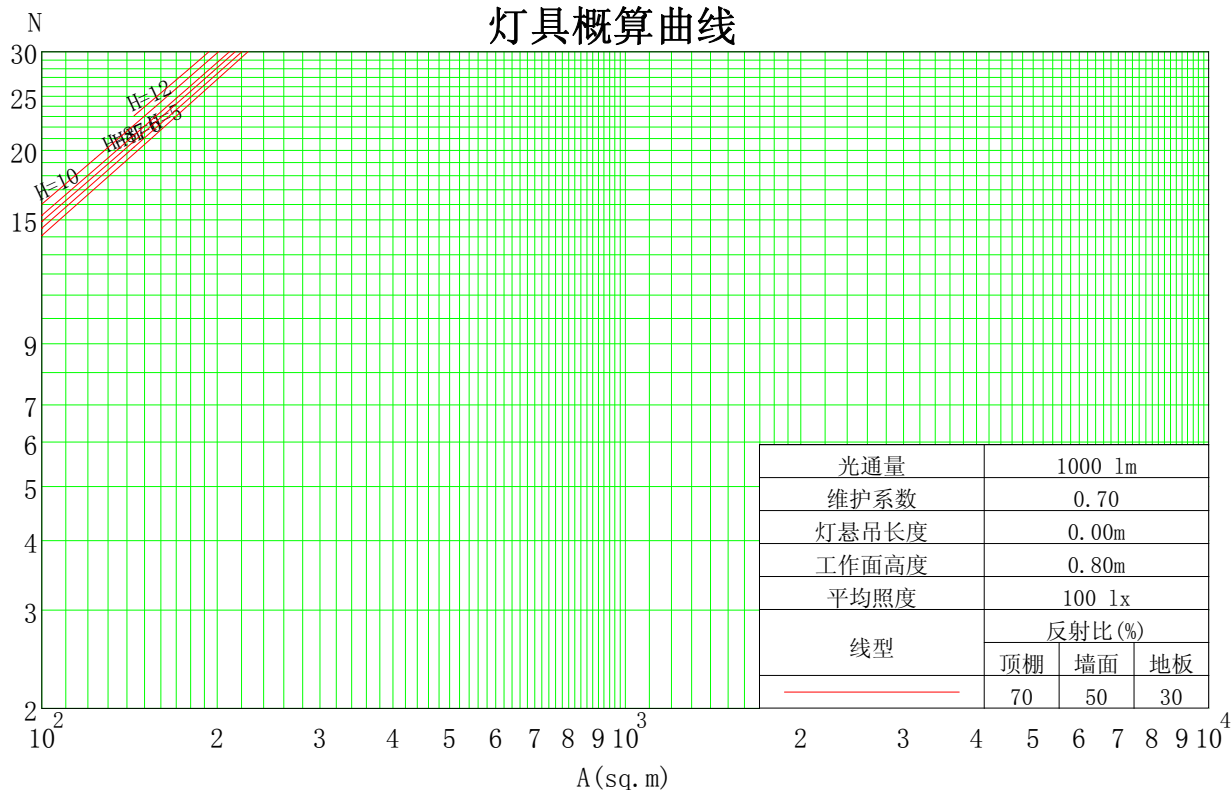

核 验:

灯具等光强图 (矩形)

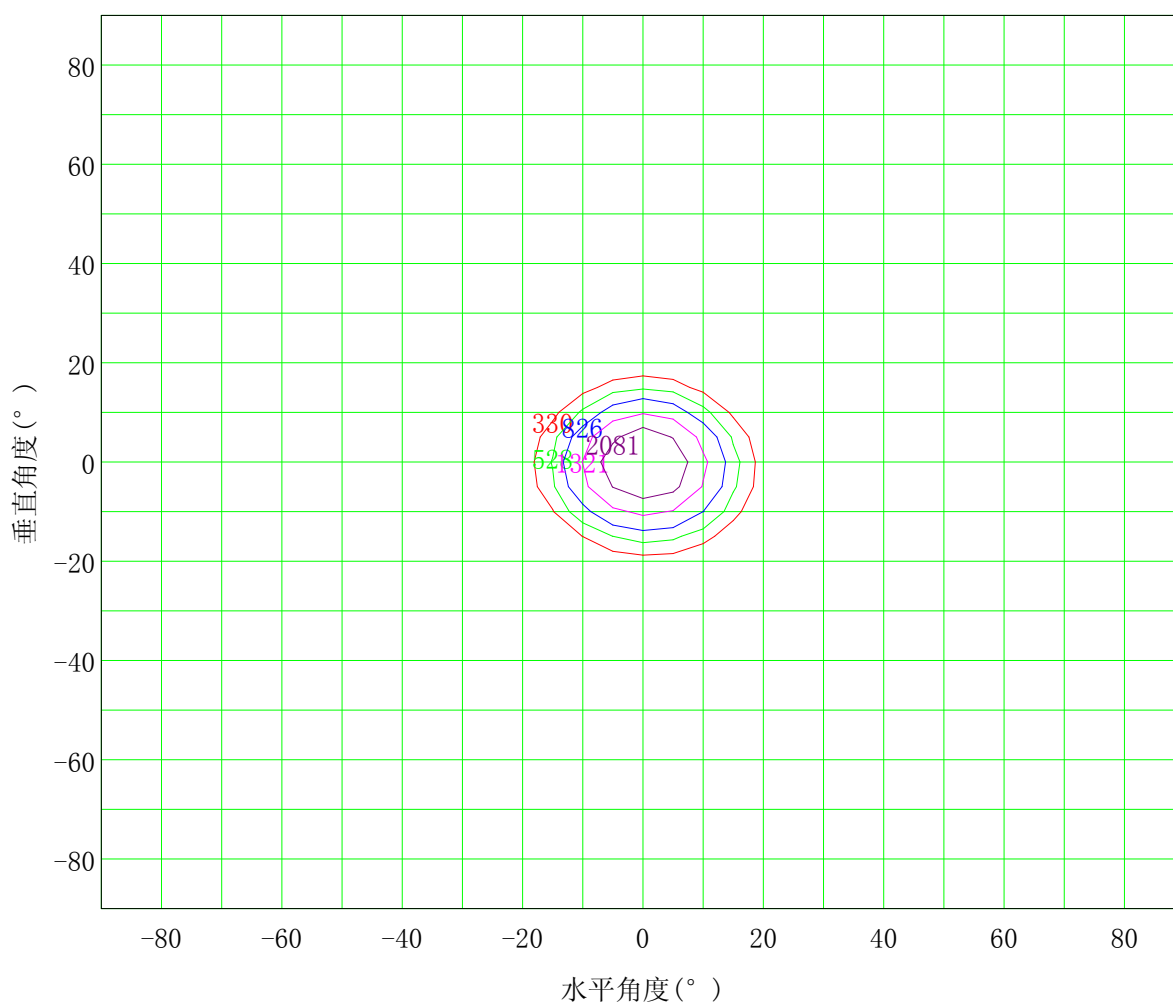

I_{max} (100%): 3303 cd

(10%):	330 cd	(16%):	528 cd
(25%):	826 cd	(40%):	1321 cd
(63%):	2081 cd	(100%):	3303 cd

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

道路灯具等光强图(圆形网图)

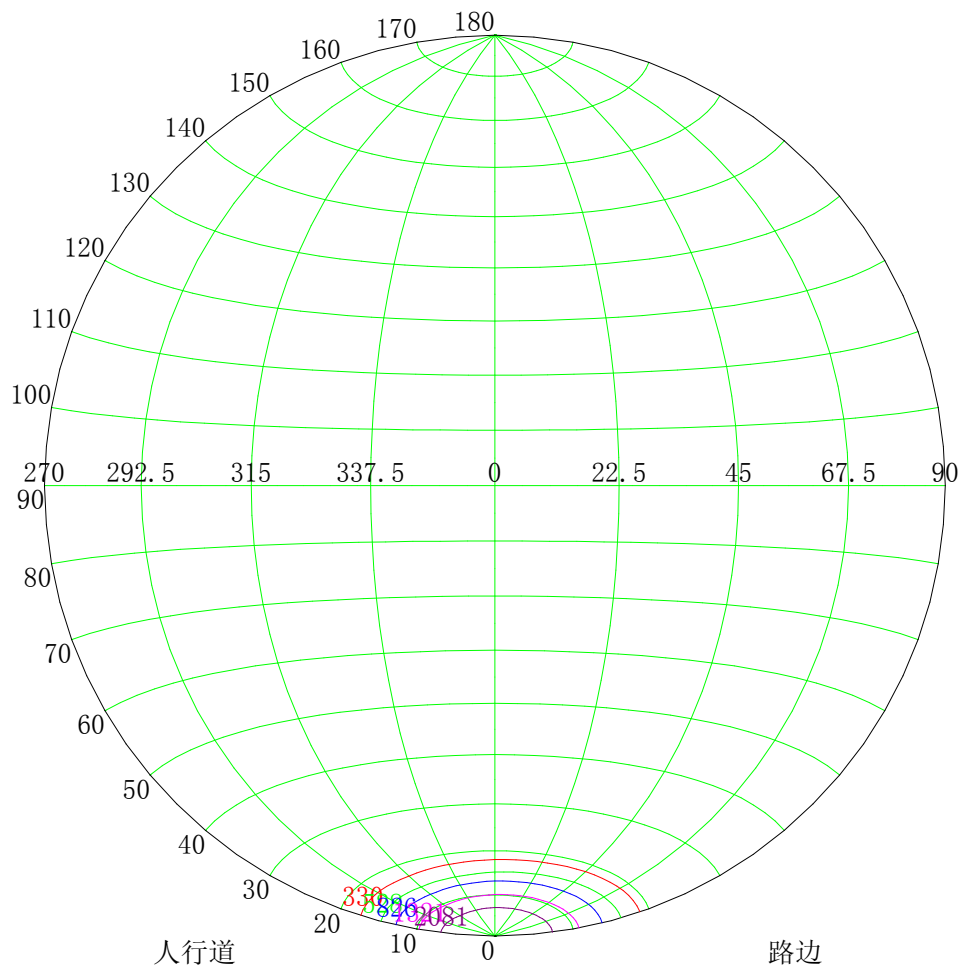

Imax (100%): 3303 cd

(10%): 330 cd	(16%): 528 cd
(25%): 826 cd	(40%): 1321 cd
(63%): 2081 cd	(100%): 3303 cd

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

水平面等照度曲线

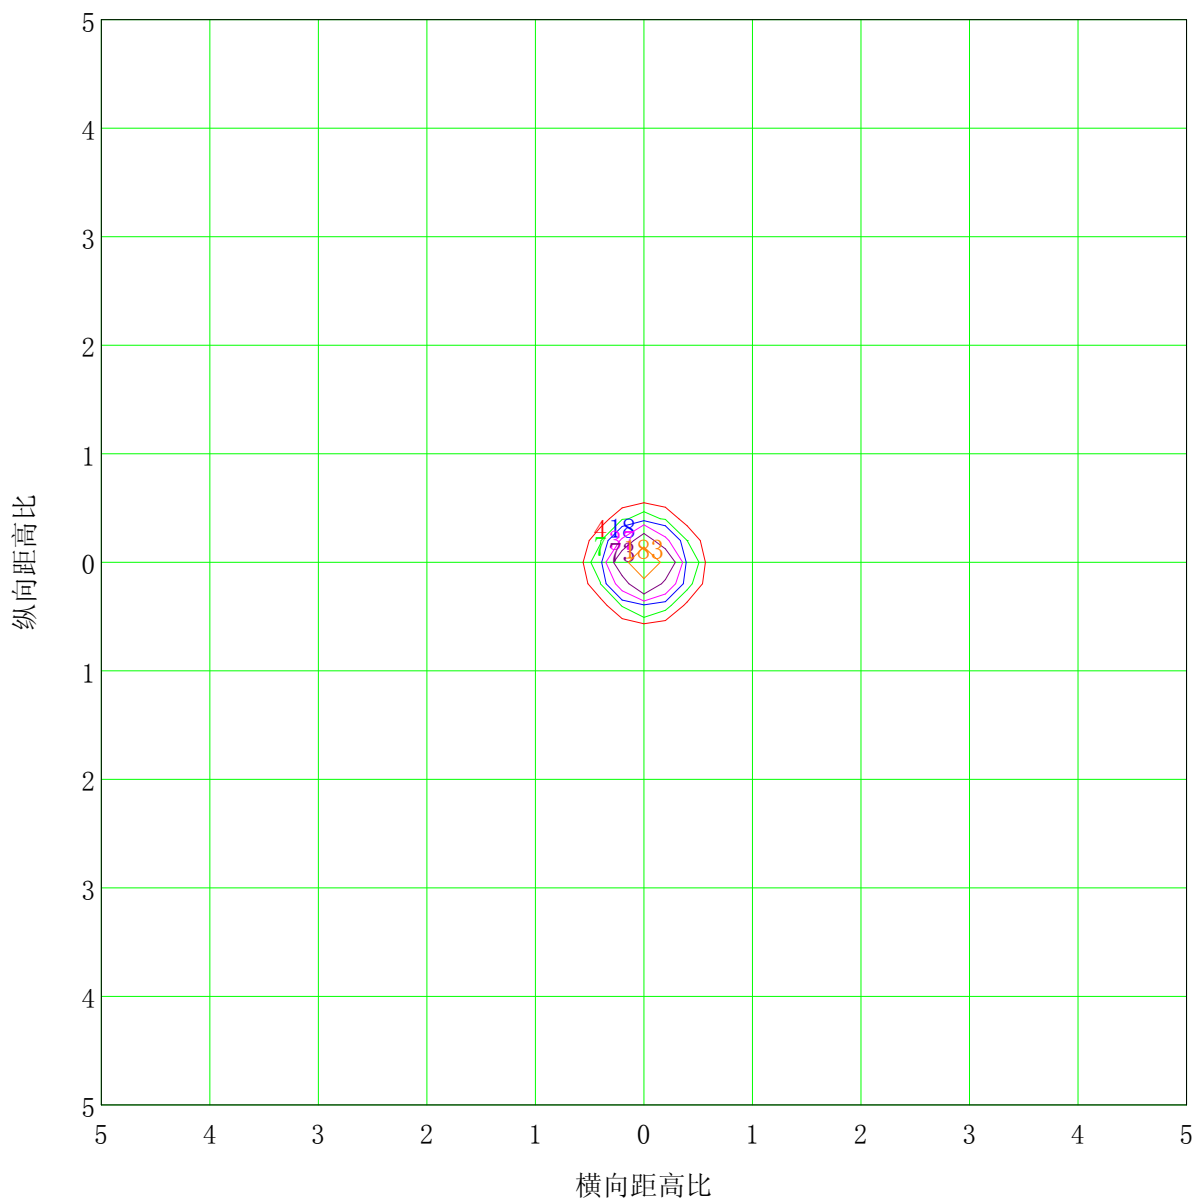

安装高度: 3.0m		最大照度值(100%): 366.8 lx	
(1%):	3.7 lx	(2%):	7.3 lx
(5%):	18.3 lx	(10%):	36.7 lx
(20%):	73.4 lx	(50%):	183.4 lx
(100%):	366.8 lx		

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600


测试距离: 7.517 m

环境湿度:

核 验:

道路灯具利用系数曲线

利用系数(%)

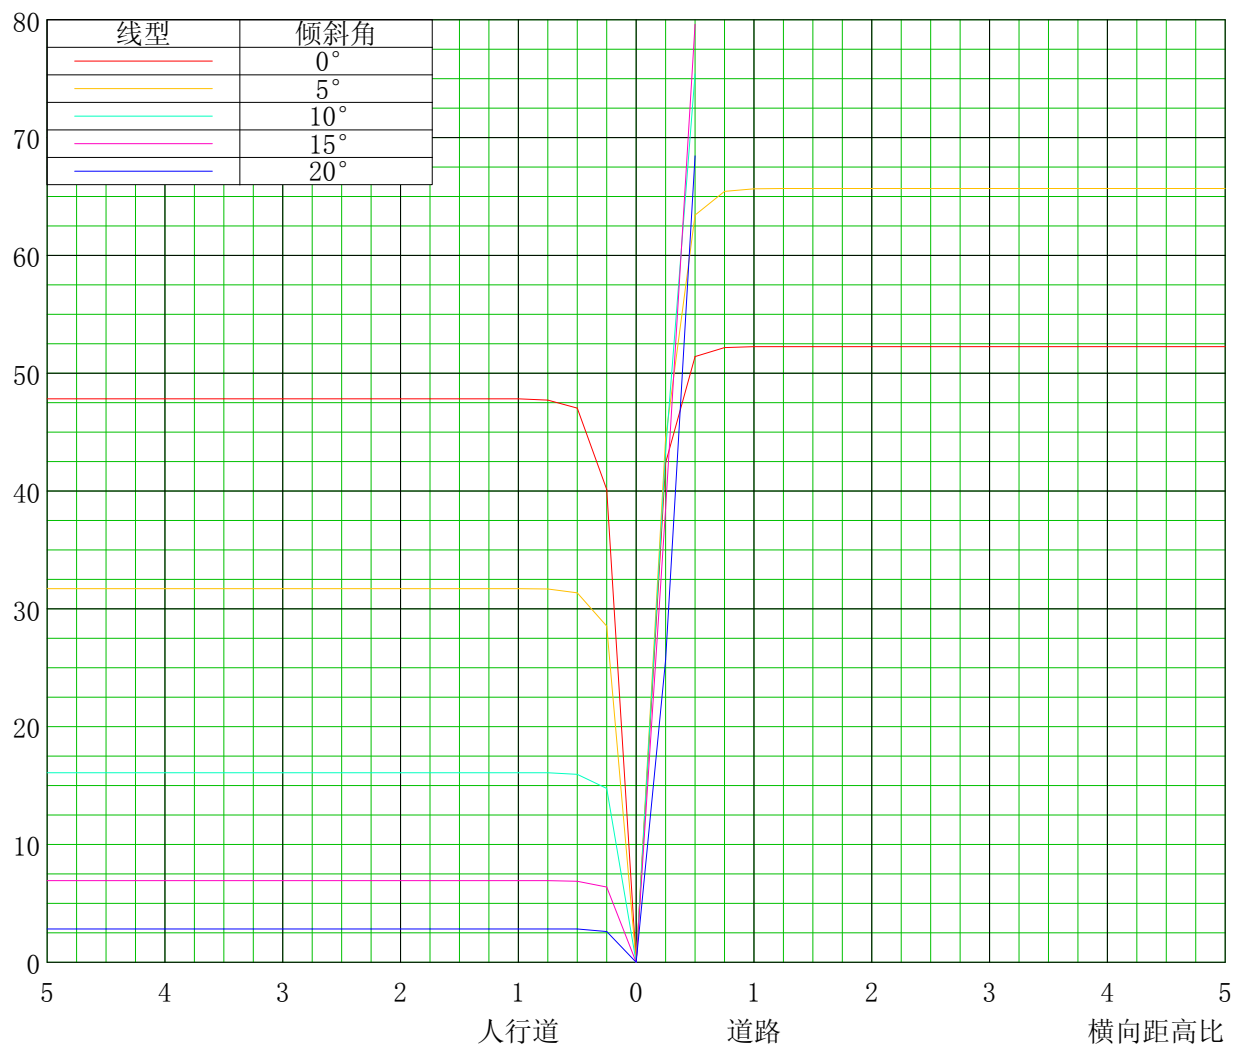

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600



测试距离: 7.517 m

环境湿度:

核 验:

亮度限制曲线

眩光评价价值	质量等级	使用照度 / lx							
1.15	A	2000	1000	500	≤300				
1.50	B		2000	1000	500	≤300			
1.85	C			2000	1000	500	≤300		
2.20	D				2000	1000	500	≤300	
2.55	E					2000	1000	500	≤300

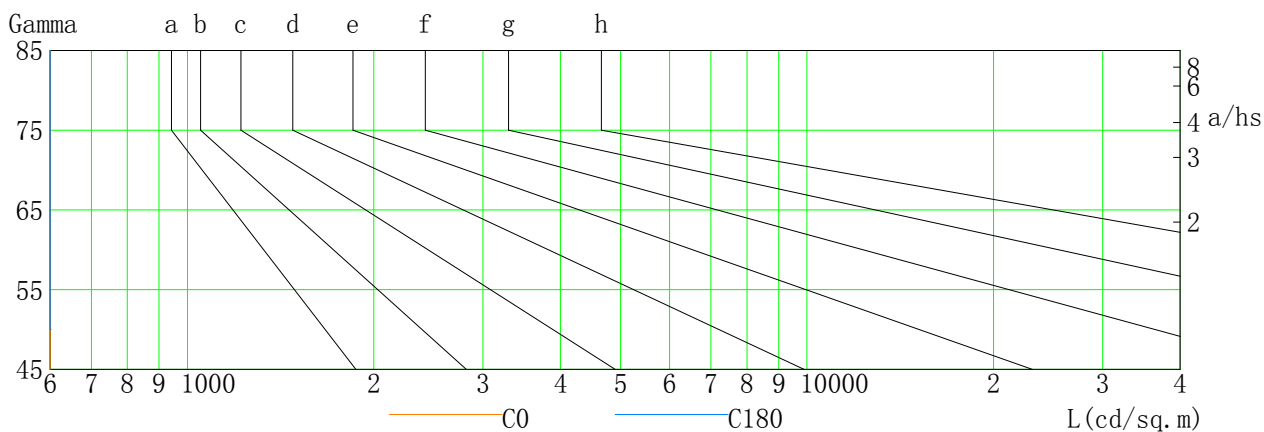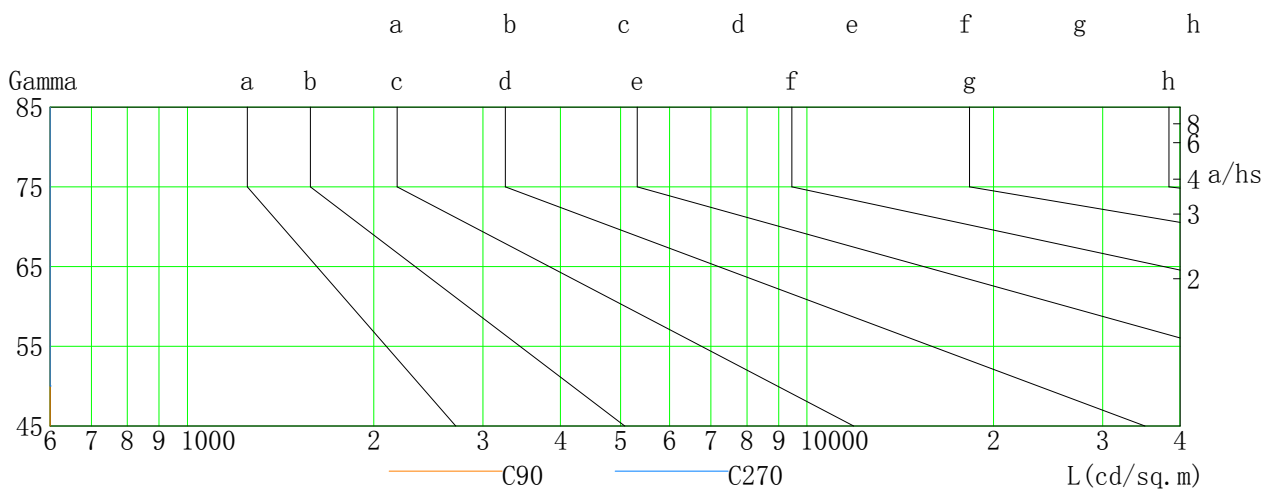

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	118	0	0	0	0	0	0	0	0
C270	584	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

照度距离关系图

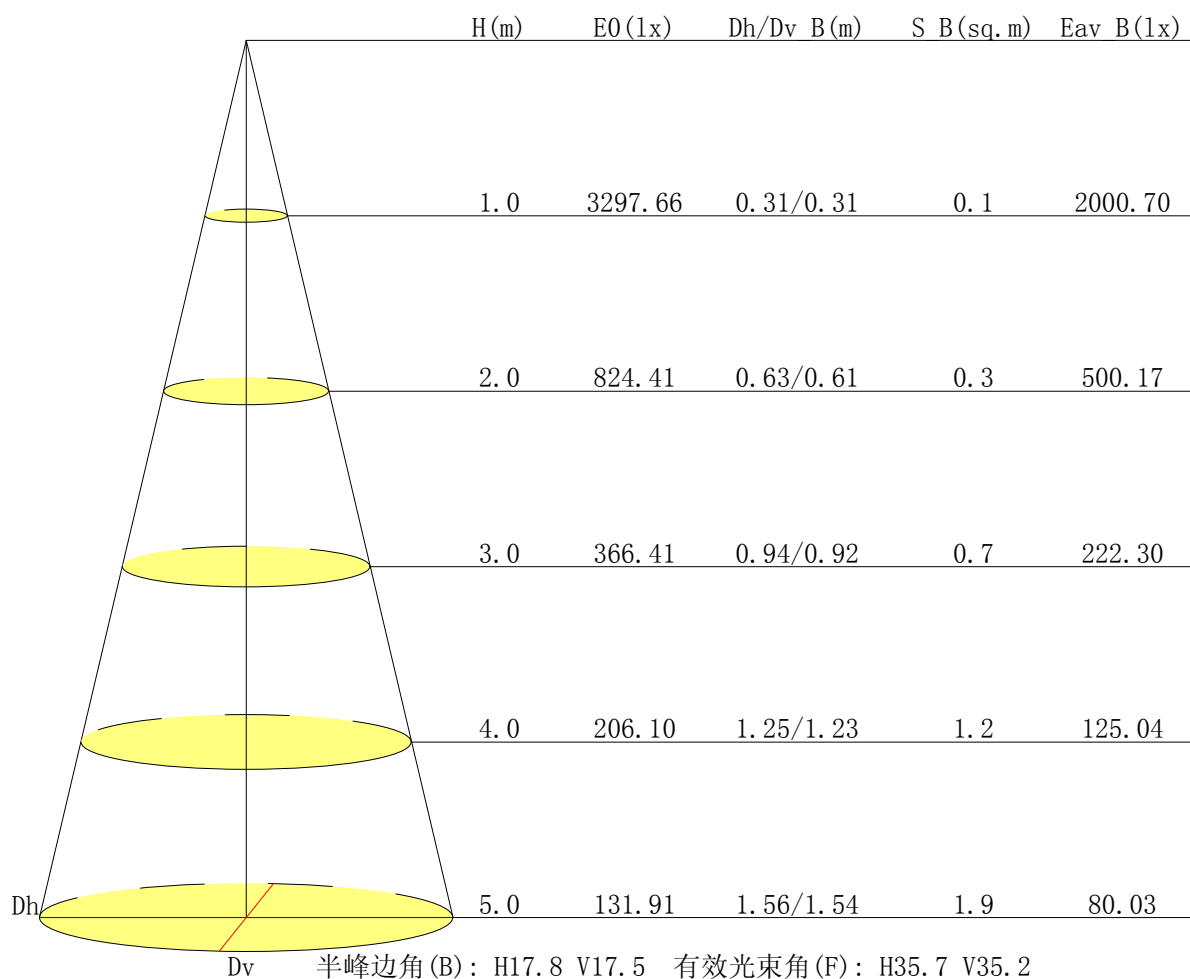

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

垂直面等照度曲线

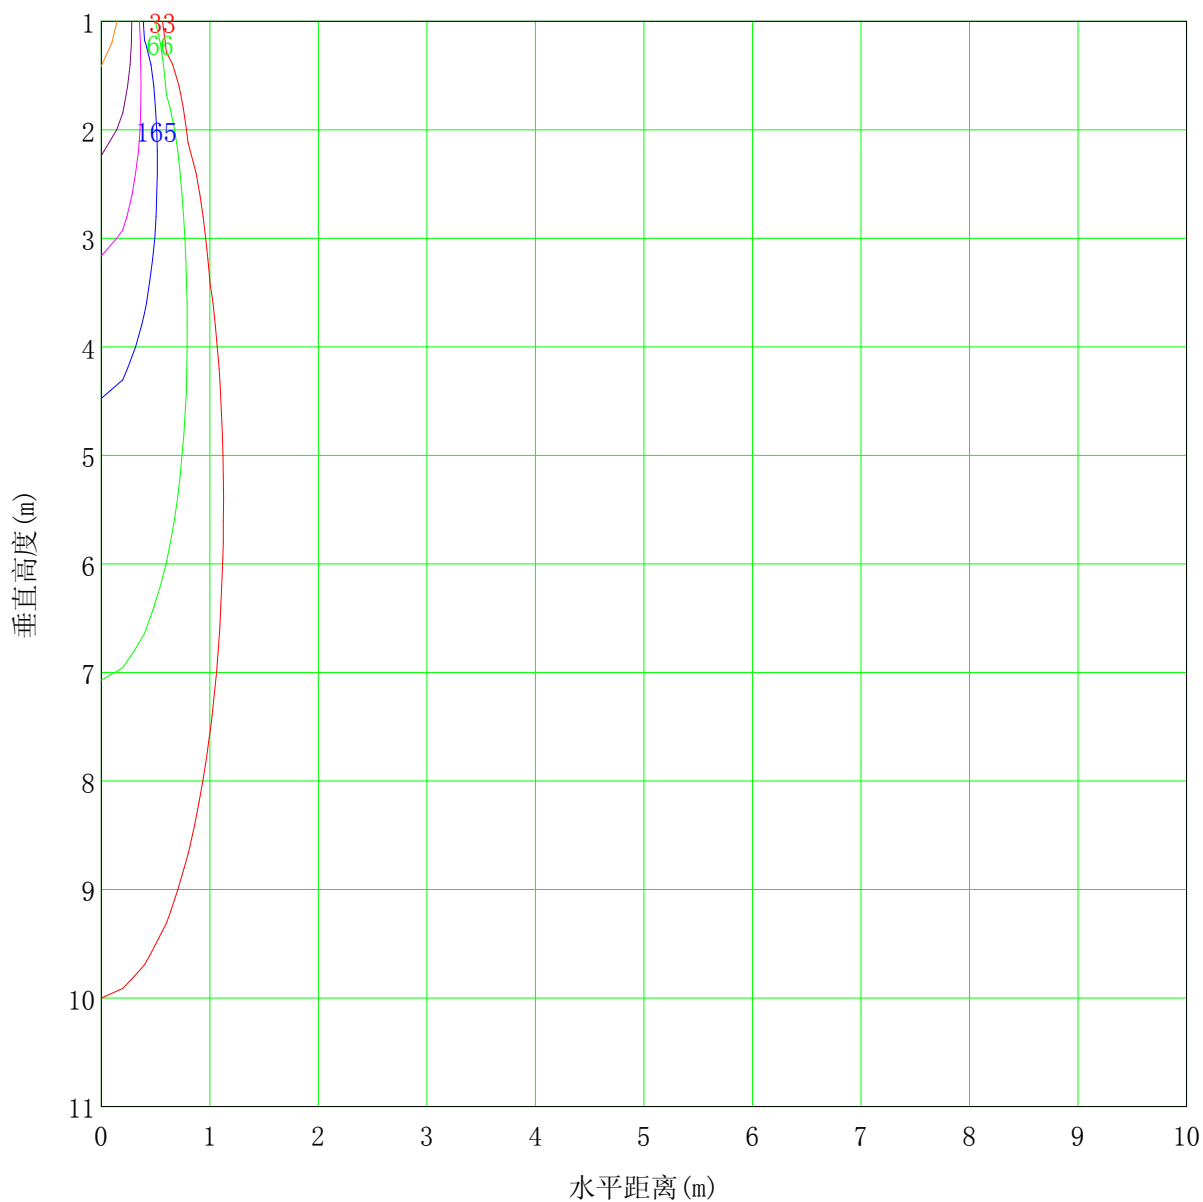

最低高度(米): 1.0m 最大高度(米): 11.0m 最大照度值: 3297.7 lx

— (1%): 33.0 lx	— (2%): 66.0 lx
— (5%): 164.9 lx	— (10%): 329.8 lx
— (20%): 659.5 lx	— (50%): 1648.8 lx
— (100%): 3297.7 lx	

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:



区域光通量表

单位: lm

纵向平面		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Φ总	Φ有
横向平面	-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Φ总	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	419	351
	Φ有	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

灯具有效平均照度图

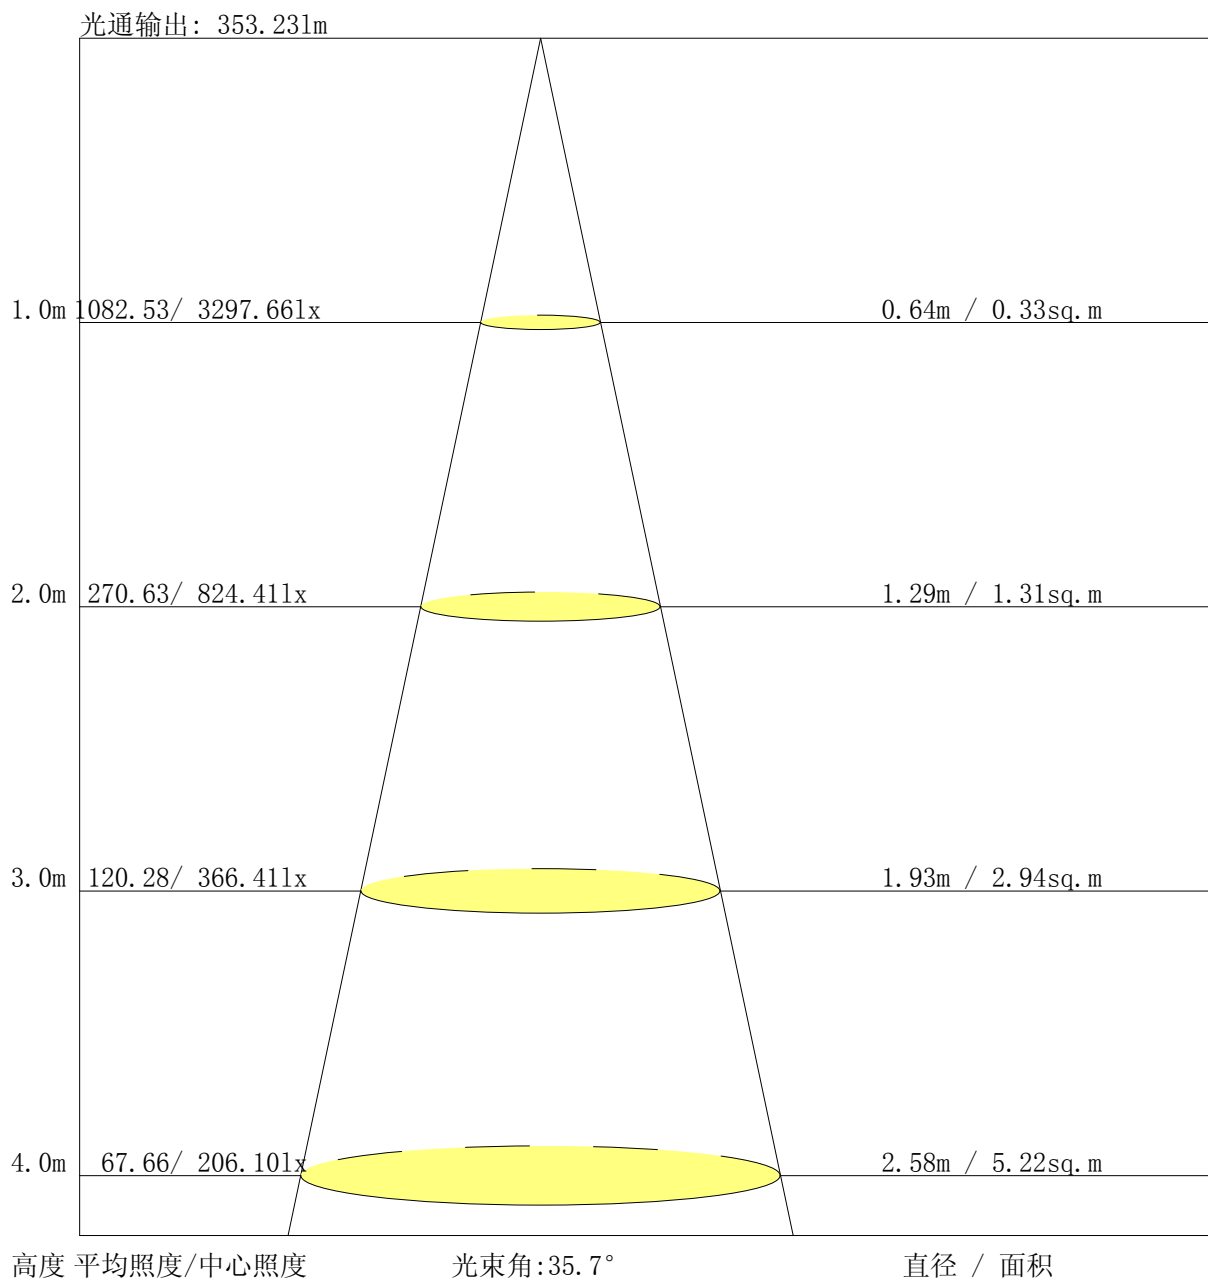

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

UGR 表

反射率:											
	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸		横向					纵向				
X=2H	Y=2H	0.5	1.0	0.7	1.2	1.4	0.7	1.2	0.9	1.4	1.5
	3H	0.4	0.8	0.6	1.1	1.3	0.5	1.0	0.8	1.2	1.5
	4H	0.3	0.7	0.6	1.0	1.2	0.5	0.9	0.7	1.2	1.4
	6H	0.2	0.6	0.5	0.9	1.2	0.4	0.8	0.7	1.1	1.4
	8H	0.2	0.6	0.5	0.9	1.2	0.3	0.8	0.7	1.0	1.3
	12H	0.1	0.5	0.5	0.8	1.1	0.3	0.7	0.6	1.0	1.3
X=4H	Y=2H	0.3	0.7	0.6	1.0	1.2	0.5	0.9	0.7	1.2	1.4
	3H	0.1	0.5	0.5	0.8	1.1	0.3	0.7	0.6	1.0	1.3
	4H	0.0	0.4	0.4	0.7	1.1	0.2	0.6	0.6	0.9	1.2
	6H	-0.0	0.3	0.4	0.6	1.0	0.1	0.4	0.5	0.8	1.2
	8H	-0.1	0.2	0.3	0.6	1.0	0.1	0.4	0.5	0.7	1.1
	12H	-0.1	0.1	0.3	0.5	1.0	0.0	0.3	0.4	0.7	1.1
X=8H	Y=4H	-0.1	0.2	0.3	0.6	1.0	0.1	0.4	0.5	0.7	1.1
	6H	-0.2	0.0	0.3	0.5	0.9	-0.0	0.2	0.4	0.6	1.1
	8H	-0.3	-0.0	0.2	0.4	0.9	-0.1	0.1	0.4	0.6	1.0
	12H	-0.3	-0.1	0.2	0.3	0.8	-0.1	0.0	0.3	0.5	1.0
X=12H	Y=4H	-0.1	0.1	0.3	0.5	1.0	0.0	0.3	0.4	0.7	1.1
	6H	-0.3	-0.0	0.2	0.4	0.9	-0.1	0.1	0.4	0.6	1.0
	8H	-0.3	-0.1	0.2	0.3	0.8	-0.1	0.0	0.3	0.5	1.0
不同间距下随观察位置不同的变化量											
S=1.0H		+5.9/-1.\$					+5.6/-1.\$				
S=1.5H		+8.8/-1.\$					+8.3/-1.\$				
S=2.0H		+10.8/-1.\$					+10.3/-1.\$				

依据CIE Pub. 117计算, 表格已按420lm光源光通量进行修正 ($81\log(F/F_0) = -3.0$).

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

BUG等级评价表

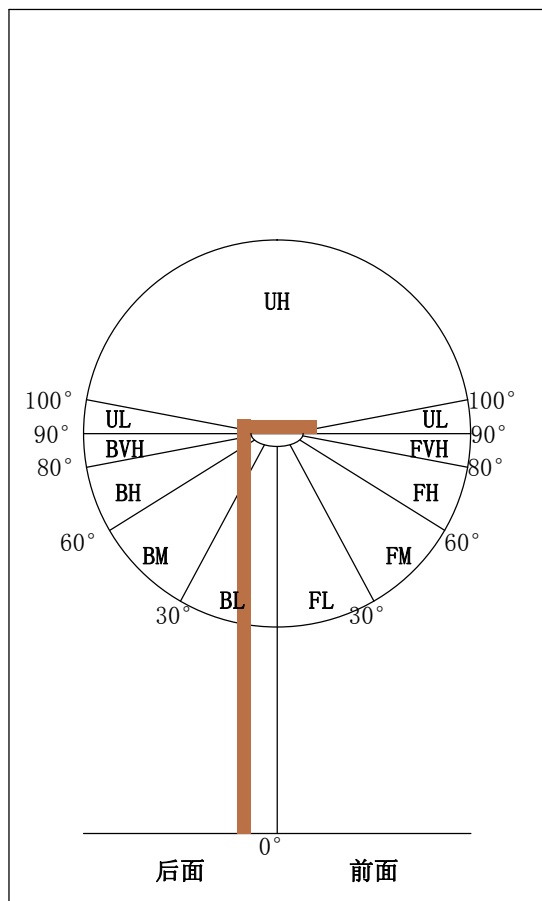

区域	光通量(1m)	光通量(%)
前面	223	53.1
FL (0° -30°)	218	52.0
FM (30° -60°)	4	1.1
FH (60° -80°)	0	0.0
FVH (80° -90°)	0	0.0
后面	197	46.9
BL (0° -30°)	192	45.9
BM (30° -60°)	4	1.1
BH (60° -80°)	0	0.0
BVH (80° -90°)	0	0.0
上面	0	0.0
UL (90° -100°)	0	0.0
UH (100° -180°)	0	0.0
限制光	NA	NA

BUG评价等级(基于TM-15-07)	
非对称灯具 (Type I, II, III, IV)	B1 U0 G0
矩形对称灯具 (Type V, Area Light)	B1 U0 G0

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0


测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

LCS 图

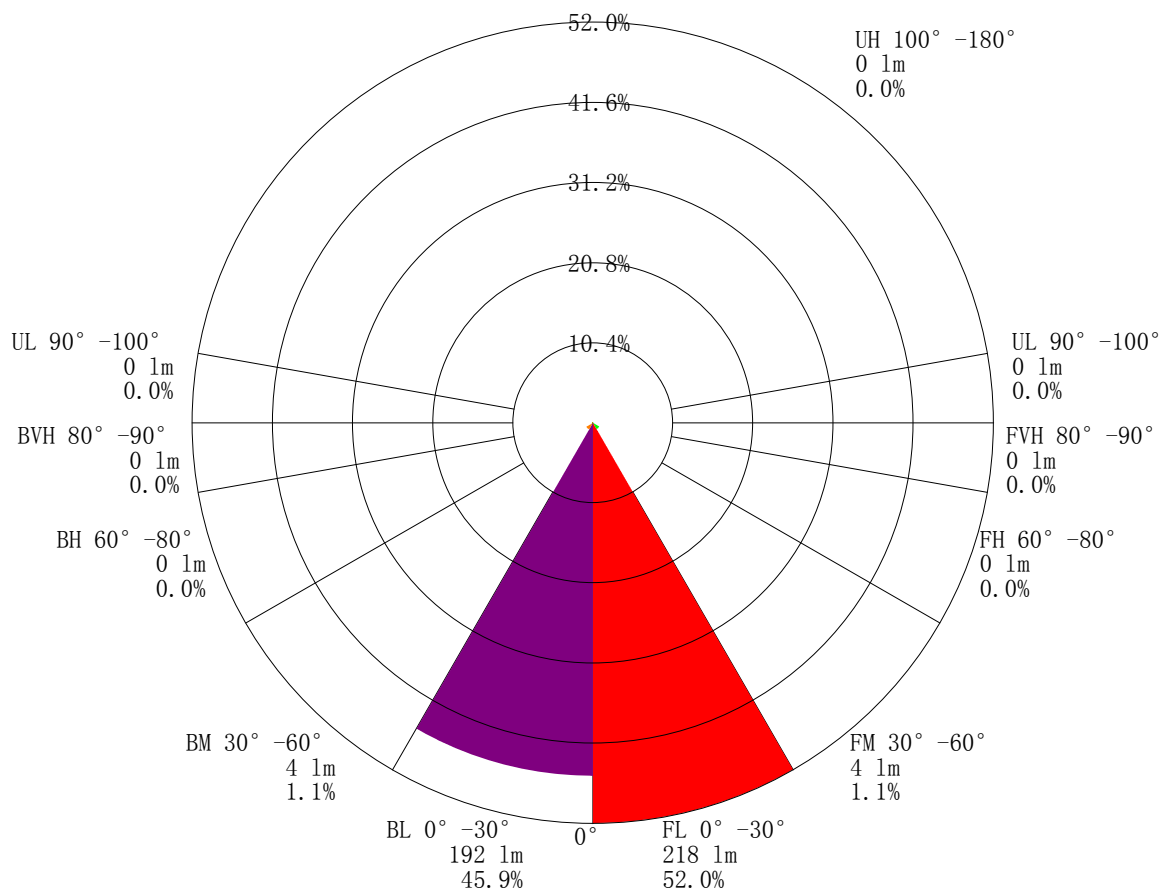

后面

刻度: MAX LCS%
限制光:NA,NA

前面

C 平面 (°):0.0-360.0: 45.0
测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-90.0:1.0
测试设备: GPM-1600
测试距离: 7.517 m
环境湿度:
核 验:

利用系数表(地面)

利用系数 UF(F)			SHR NOM = 0.50								
房间反射率			室形指数 (RI)								
天花板	墙面	地面	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	1.05	1.09	1.11	1.13	1.15	1.17	1.18	1.20	1.21
	0.30		1.02	1.05	1.08	1.10	1.13	1.15	1.16	1.18	1.19
	0.20		0.99	1.03	1.06	1.08	1.11	1.13	1.14	1.16	1.18
0.50	0.50	0.20	1.04	1.07	1.09	1.10	1.12	1.14	1.15	1.16	1.16
	0.30		1.01	1.04	1.07	1.08	1.10	1.12	1.13	1.14	1.15
	0.20		0.99	1.02	1.05	1.06	1.09	1.10	1.12	1.13	1.14
0.30	0.50	0.20	1.03	1.05	1.07	1.08	1.10	1.11	1.11	1.12	1.13
	0.30		1.00	1.03	1.05	1.06	1.08	1.09	1.10	1.11	1.12
	0.20		0.99	1.01	1.03	1.05	1.07	1.08	1.09	1.10	1.11
0.00	0.00	0.00	0.97	1.00	1.01	1.02	1.04	1.04	1.05	1.06	1.06
等级:8W 没有天花板的光度测定. 乘上利用系数的校正值 根据CIBSE TM5 1980标准计算											

C 平面 (°):0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-90.0:1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

利用系数表(墙面)

利用系数 UF(W)			SHR NOM = 0.50								
房间反射率			室形指数 (RI)								
天花板	墙面	地面	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.40	0.33	0.28	0.25	0.20	0.17	0.14	0.11	0.09
	0.30		0.34	0.28	0.25	0.22	0.18	0.15	0.13	0.10	0.09
	0.20		0.29	0.25	0.22	0.20	0.16	0.14	0.12	0.10	0.08
0.50	0.50	0.20	0.38	0.31	0.26	0.23	0.18	0.20	0.13	0.10	0.08
	0.30		0.32	0.27	0.23	0.20	0.16	0.14	0.12	0.09	0.08
	0.20		0.28	0.24	0.21	0.18	0.15	0.13	0.11	0.09	0.07
0.30	0.50	0.20	0.36	0.28	0.24	0.21	0.16	0.13	0.11	0.09	0.07
	0.30		0.30	0.25	0.21	0.19	0.15	0.12	0.11	0.08	0.07
	0.20		0.27	0.22	0.19	0.17	0.14	0.12	0.10	0.08	0.07
0.00	0.00	0.00	0.11	0.08	0.06	0.05	0.04	0.03	0.03	0.02	0.02
等级:8W 没有天花板的光度测定. 乘上利用系数的校正值 根据CIBSE TM5 1980标准计算											

C 平面 (°):0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-90.0:1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

利用系数表(天花板)

利用系数 UF(C)			SHR NOM = 0.50								
房间反射率			室形指数 (RI)								
天花板	墙面	地面	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.12	0.14	0.15	0.17	0.18	0.19	0.20	0.21	0.22
	0.30		0.09	0.11	0.13	0.14	0.16	0.18	0.19	0.20	0.21
	0.20		0.07	0.09	0.11	0.12	0.15	0.16	0.17	0.19	0.20
0.50	0.50	0.20	0.11	0.13	0.15	0.16	0.18	0.19	0.19	0.20	0.21
	0.30		0.09	0.11	0.13	0.14	0.16	0.17	0.18	0.19	0.20
	0.20		0.07	0.09	0.11	0.12	0.14	0.16	0.17	0.18	0.19
0.30	0.50	0.20	0.11	0.13	0.14	0.15	0.17	0.18	0.19	0.19	0.20
	0.30		0.09	0.11	0.12	0.14	0.15	0.17	0.17	0.19	0.19
	0.20		0.07	0.09	0.11	0.12	0.14	0.15	0.16	0.18	0.19
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA
等级:8W 没有天花板的光度测定. 乘上利用系数的校正值 根据CIBSE TM5 1980标准计算											

C 平面 (°):0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-90.0:1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

灯具环带光通量

Gamma [°]	平均光强 [cd]	环带光通 [lm]	累积光通 [lm]	环带光通 [%]	累积光通 [%]
0.0-1.0	3283.5	3.1	3.1	0.75	0.75
1.0-2.0	3226.4	9.3	12.4	2.21	2.96
2.0-3.0	3114.2	14.9	27.3	3.55	6.51
3.0-4.0	2951.6	19.8	47.1	4.71	11.22
4.0-5.0	2744.2	23.6	70.7	5.63	16.85
5.0-6.0	2504.7	26.3	97.0	6.27	23.12
6.0-7.0	2245.2	27.9	124.9	6.64	29.76
7.0-8.0	1981.4	28.4	153.2	6.76	36.52
8.0-9.0	1724.9	28.0	181.2	6.66	43.19
9.0-10.0	1484.1	26.9	208.0	6.40	49.59
10.0-11.0	1267.1	25.3	233.4	6.04	55.63
11.0-12.0	1073.3	23.5	256.8	5.59	61.22
12.0-13.0	902.9	21.4	278.3	5.11	66.33
13.0-14.0	754.6	19.3	297.6	4.60	70.93
14.0-15.0	626.9	17.2	314.8	4.10	75.03
15.0-16.0	518.4	15.2	330.0	3.62	78.66
16.0-17.0	425.8	13.3	343.3	3.16	81.82
17.0-18.0	348.1	11.5	354.7	2.74	84.55
18.0-19.0	283.7	9.9	364.6	2.35	86.91
19.0-20.0	230.7	8.4	373.0	2.01	88.92
20.0-21.0	187.5	7.2	380.2	1.72	90.63
21.0-22.0	152.3	6.1	386.4	1.46	92.09
22.0-23.0	123.5	5.2	391.6	1.24	93.33
23.0-24.0	99.8	4.4	395.9	1.04	94.37
24.0-25.0	80.1	3.6	399.6	0.87	95.24
25.0-26.0	64.2	3.0	402.6	0.72	95.96
26.0-27.0	51.7	2.5	405.1	0.60	96.56
27.0-28.0	41.9	2.1	407.2	0.51	97.07
28.0-29.0	34.3	1.8	409.0	0.43	97.50
29.0-30.0	28.5	1.5	410.6	0.37	97.86
30.0-31.0	24.0	1.3	411.9	0.32	98.18
31.0-32.0	20.5	1.2	413.1	0.28	98.46
32.0-33.0	17.6	1.0	414.1	0.25	98.71
33.0-34.0	15.2	0.9	415.0	0.22	98.93
34.0-35.0	13.1	0.8	415.9	0.19	99.12
35.0-36.0	11.4	0.7	416.6	0.17	99.30

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

灯具环带光通量 (续 1)

Gamma [°]	平均光强 [cd]	环带光通 [lm]	累积光通 [lm]	环带光通 [%]	累积光通 [%]
36.0-37.0	9.8	0.6	417.2	0.15	99.45
37.0-38.0	8.4	0.6	417.8	0.13	99.58
38.0-39.0	7.1	0.5	418.3	0.11	99.70
39.0-40.0	5.7	0.4	418.7	0.10	99.79
40.0-41.0	4.5	0.3	419.0	0.08	99.87
41.0-42.0	3.2	0.2	419.2	0.06	99.92
42.0-43.0	2.2	0.2	419.4	0.04	99.96
43.0-44.0	1.3	0.1	419.5	0.02	99.99
44.0-45.0	0.6	0.0	419.5	0.01	100.00
45.0-46.0	0.2	0.0	419.5	0.00	100.00
46.0-47.0	0.0	0.0	419.5	0.00	100.00
47.0-48.0	0.0	0.0	419.5	0.00	100.00
48.0-49.0	0.0	0.0	419.5	0.00	100.00
49.0-50.0	0.0	0.0	419.5	0.00	100.00
50.0-51.0	0.0	0.0	419.5	0.00	100.00
51.0-52.0	0.0	0.0	419.5	0.00	100.00
52.0-53.0	0.0	0.0	419.5	0.00	100.00
53.0-54.0	0.0	0.0	419.5	0.00	100.00
54.0-55.0	0.0	0.0	419.5	0.00	100.00
55.0-56.0	0.0	0.0	419.5	0.00	100.00
56.0-57.0	0.0	0.0	419.5	0.00	100.00
57.0-58.0	0.0	0.0	419.5	0.00	100.00
58.0-59.0	0.0	0.0	419.5	0.00	100.00
59.0-60.0	0.0	0.0	419.5	0.00	100.00
60.0-61.0	0.0	0.0	419.5	0.00	100.00
61.0-62.0	0.0	0.0	419.5	0.00	100.00
62.0-63.0	0.0	0.0	419.5	0.00	100.00
63.0-64.0	0.0	0.0	419.5	0.00	100.00
64.0-65.0	0.0	0.0	419.5	0.00	100.00
65.0-66.0	0.0	0.0	419.5	0.00	100.00
66.0-67.0	0.0	0.0	419.5	0.00	100.00
67.0-68.0	0.0	0.0	419.5	0.00	100.00
68.0-69.0	0.0	0.0	419.5	0.00	100.00
69.0-70.0	0.0	0.0	419.5	0.00	100.00
70.0-71.0	0.0	0.0	419.5	0.00	100.00
71.0-72.0	0.0	0.0	419.5	0.00	100.00

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

光强分布数据表格

单位: cd

G\ C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G0.0	3297.7	3297.7	3297.7	3297.7	3297.7	3297.7	3297.7	3297.7	3297.7	
G1.0	3256.9	3268.6	3276.3	3302.9	3278.7	3265.0	3266.2	3240.1	3256.9	
G2.0	3158.7	3171.5	3184.4	3240.9	3203.2	3188.9	3185.2	3135.1	3158.7	
G3.0	3007.2	3023.7	3040.2	3124.8	3083.3	3053.7	3051.2	2975.9	3007.2	
G4.0	2810.3	2838.5	2865.6	2965.2	2908.6	2866.4	2851.8	2758.6	2810.3	
G5.0	2569.8	2614.7	2654.9	2772.6	2700.1	2627.7	2608.7	2494.3	2569.8	
G6.0	2319.1	2378.6	2427.6	2552.5	2453.6	2358.7	2322.1	2220.1	2319.1	
G7.0	2053.1	2117.4	2176.2	2320.7	2200.5	2061.7	2031.5	1929.9	2053.1	
G8.0	1804.2	1861.8	1930.7	2071.5	1937.9	1790.3	1743.5	1670.9	1804.2	
G9.0	1551.5	1617.5	1679.4	1827.8	1686.2	1530.8	1471.1	1423.1	1551.5	
G10.0	1335.1	1390.2	1450.9	1585.3	1446.7	1297.3	1241.9	1210.6	1335.1	
G11.0	1132.4	1192.8	1243.8	1370.9	1238.1	1085.9	1037.0	1014.3	1132.4	
G12.0	953.0	1010.6	1065.9	1168.8	1047.7	905.0	859.3	846.6	953.0	
G13.0	796.3	852.2	899.4	997.2	880.7	751.6	711.9	700.9	796.3	
G14.0	662.9	707.8	757.2	844.7	735.9	614.8	586.2	574.4	662.9	
G15.0	546.4	588.9	629.9	714.7	615.8	500.6	477.4	473.3	546.4	
G16.0	450.1	485.1	525.4	596.7	507.9	406.3	387.7	387.4	450.1	
G17.0	365.1	396.0	434.2	494.8	417.4	330.9	313.0	315.5	365.1	
G18.0	296.7	321.2	359.7	409.7	342.7	266.1	250.8	255.2	296.7	
G19.0	241.0	260.8	291.7	336.6	280.9	216.8	201.9	207.1	241.0	
G20.0	194.3	210.1	236.5	275.5	229.5	176.2	164.0	167.6	194.3	
G21.0	158.3	171.2	191.5	225.0	186.1	145.3	132.7	135.9	158.3	
G22.0	128.4	138.1	154.1	181.3	151.2	118.5	108.9	110.5	128.4	
G23.0	103.1	110.8	122.5	146.7	123.9	98.3	89.6	90.8	103.1	
G24.0	81.8	87.4	97.8	116.9	99.1	80.4	74.5	73.4	81.8	
G25.0	64.6	68.2	76.6	93.8	79.5	66.9	61.4	59.5	64.6	
G26.0	51.8	53.3	60.8	74.9	63.4	54.2	50.8	47.9	51.8	
G27.0	42.3	43.0	48.8	60.3	51.5	43.4	40.8	39.4	42.3	
G28.0	35.0	35.0	39.0	48.7	42.2	34.9	32.9	32.9	35.0	
G29.0	29.5	28.9	31.7	39.1	34.8	28.8	27.5	28.0	29.5	
G30.0	24.8	23.8	26.2	32.3	28.9	24.3	23.5	23.8	24.8	
G31.0	21.0	20.2	22.0	27.1	24.5	20.8	20.4	20.7	21.0	
G32.0	17.9	16.9	18.7	23.0	21.0	18.0	17.7	18.1	17.9	
G33.0	15.5	14.4	16.0	19.7	18.1	15.5	15.5	15.9	15.5	
G34.0	13.2	12.3	13.7	16.9	15.8	13.4	13.5	13.8	13.2	
G35.0	11.5	10.6	11.7	14.6	13.7	11.7	11.7	12.1	11.5	
G36.0	9.9	9.0	10.2	12.7	12.1	10.1	10.3	10.4	9.9	

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G37.0	8.5	7.5	8.4	10.9	10.6	8.7	9.0	9.1	8.5	
G38.0	7.2	6.2	6.9	9.3	9.0	7.6	7.7	7.8	7.2	
G39.0	5.9	4.9	5.4	7.7	7.6	6.4	6.6	6.6	5.9	
G40.0	4.6	3.6	3.9	6.1	6.1	5.3	5.6	5.5	4.6	
G41.0	3.4	2.4	2.7	4.5	4.6	4.2	4.5	4.3	3.4	
G42.0	2.0	1.4	1.8	3.2	3.1	3.1	3.6	3.1	2.0	
G43.0	1.1	0.7	0.8	2.1	1.9	2.0	2.5	2.2	1.1	
G44.0	0.3	0.0	0.2	1.1	0.9	1.2	1.8	1.1	0.3	
G45.0	0.0	0.0	0.0	0.4	0.2	0.5	1.0	0.4	0.0	
G46.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.0	
G47.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G48.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G49.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G50.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G51.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G52.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G53.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G54.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G55.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G56.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G57.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G58.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G59.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G60.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G61.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G62.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G63.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G64.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G65.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G66.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G67.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G68.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G69.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G71.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G72.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G73.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C 平面 (°): 0.0-360.0: 45.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-90.0: 1.0

测试设备: GPM-1600

测试距离: 7.517 m

环境湿度:

核 验:

