

Specifications

GONGZHI SERIES LED DOWNLIGHT

PRODUCTION NAME	8-12W WALL-WASHER	6-8W WALL-WASHER
Index #	RAVLPC3055A	RAVLPC3055B



Foshan Ryaven Lighting Co.,Ltd

Add: A1 zone, New lighting sourcing industry, Nanhai Foshan, Guangdong, China.

Tell: 86 0757-63862256 Fax: 86 0757-81992180

Image:



LPC3055A



LPC3055B

Feature:

* Unique design, simple and generous, small and delicate, industrial technology sense.

* Modular design of optical parts, which can be changed according to different applications.


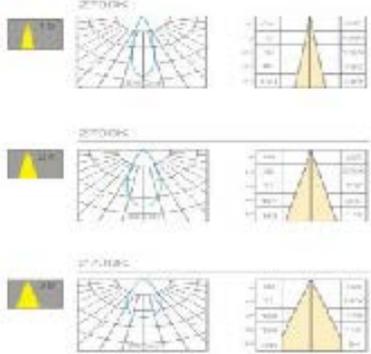
* Flexible adjustable mechanism to meet the needs of multi-directional lighting.

* Various optical accessories are available.

* High quality aluminum convection heat dissipation design, excellent heat dissipation, effectively extend the lifespan of LED chips.


* High energy efficiency, flicker free, and fast push kits adhere EU standards.

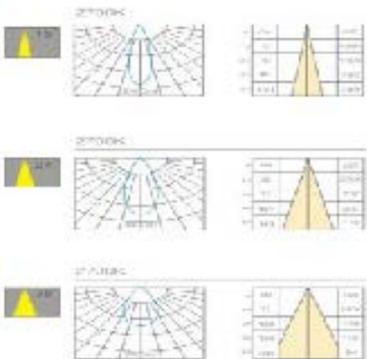
Gongzi Series Data Sheet

Index# LPC3055A		Image: 	
Item: GONGZHI SERIES LED DOWNLIGHT WALL-WASHER			
Size: $\phi 86 \times H88 \text{mm}$	Installations: recessed		
Cutout: $\phi 75 \text{mm}$	Safety Class: II		
Application: Indoors	IP: IP20		
Materials: Aluminum	Finishing: Matt White+ Grey		
Voltage: AC220V-240V	Power: 8W-12W	Size: 	
LED: COB	Color temperature: 2700K 3000K 3500K 4000K		
CRI: Ra>90	Lumens: >480LM		
Component: reflector	Beam angle: 15/24/38 °		
Driver: Rayven	Flicker free		
Output voltage:	Output current:		
Dimmable: traic dimming/ 0-10v dimming/ DALI dimming			Light diagram 
Testing standard: IEC60598/GB7000.1			
Certification: CCC,CE,ROHS			
Working temperature: -20°C to +50°C	Storing temperature) -20°C to +50°C		
Lifespan: >30000H			
Package: Carton	PCS/Per Carton:		
Package size:			

Reflector in different finishing					
黑铬	白铬	雾银	哑白	哑黑	亮金
					

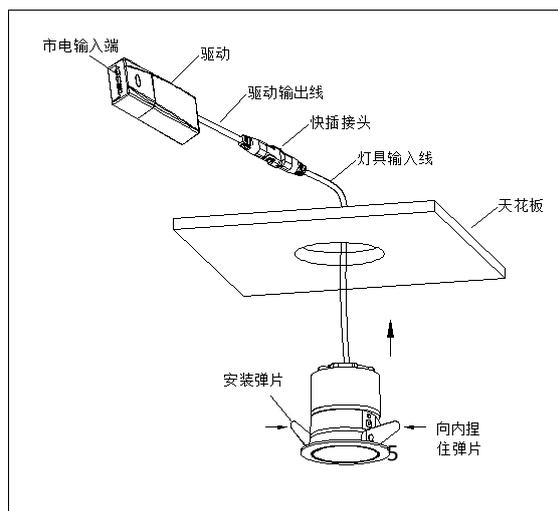
Data Sheet

Index #: LPC3055B		Image: 
Item: GongZhi series LED adjustable Wall-washer		
Size: $\phi 66 * H65mm$	Installations: recessed	
Cut out: $\phi 55mm$	Safety Class: II	
Application: Indoors	IP: IP20	
Materials: Aluminum	Finishing: Matt White+ Grey	
Voltage :AC220V-240V	Power: 6W-8W	Size:
LED: COB	Color temperature: 2700K 3000K 3500K 4000K	
CRI: Ra>90	Lumens: >480LM	
Component: reflector	Beam angle: 15/24/38 °	
Driver: Rayven	Flicker free	
Output voltage:	Output current:	
Dimmable: traic dimming/ 0-10v dimming/ DALI dimming		

Testing standard: IEC60598/GB7000.1					
Certification: CCC,CE,ROHS					
Working temperature: -20°Cto+50°C	Storing temperature -20°Cto+50°C				
Lifespan:>30000H					
Package: Carton	PCS/CARTON				
Carton size: L*W*HCM					
Reflector in different finishing					
黑铬	白铬	雾银	哑白	哑黑	亮金
					

Installation instructions:

1. Cutting out the holes with diameter of $\varnothing 55/\varnothing 75\text{mm}$ on the ceiling with thickness of 5.5-20mm
2. Connecting driver input to the power supply, and DC cable of the light.
(Notice: to avoid electric shock, please must cut off the mains before install the lamps)
3. Pinching the mounting spring and push the downlight into the cutout holes.



Notice:

1. This product is used in the dry indoor area. It is not allow to use in outdoors, especially under the high temperature and dusty areas. Otherwise it will cause fire and electric shock easily.
2. Please ensure cut off the mains before installations.